

HEAVY DUTY OIL & FUEL ABSORBENT PADS

The SpilMax® range of absorbents have undergone extensive testing to ensure their absorbency and performance.

SpilMax® Heavy Duty 400gsm Oil & Fuel Absorbent Pads will absorb a wide variety of plant and seed oils, hydrocarbons, petrochemicals and petroleum-based solvents. Because the pads are hydrophobic and repel water, they are an ideal absorbent for use around water and in wet conditions.

Even when fully saturated, these pads will float on water. They are ideal for use with spills in waterways, and for use on boats, in marinas, on wet worksites and in or near stormwater outlets. Single pads can be used to capture small leaks, clean up small spills and wipe down tools, equipment or drum tops. Rolls of perforated pads will tear off in custom sized sheets ideal

for use under vehicles and equipment during maintenance or refueling and to create set down areas for containers or leaking equipment.

Made of melt blown polypropylene with dimples and scrim for greater durability. Each pad absorbs 1L per saturation. Pads can be wrung out and reused many times during spill clean up.

TESTING: ASTM Test Method F726-06 "Sorbent Performance of Absorbents" to test maximum oil capacity.



CODE	SIZE	PAD QTY	DIMENSIONS	WEIGHT
CH1320	480mmL x 430mmW	100/Box	0.50mL x 0.45mW x 0.44mH	10 kg
CH1308	43mL x 960mmW	200/Roll	0.48mL x 0.48mW x 0.96mH	15 kg
CH13083	43mL x 480mmW	100/Roll	0.48mL x 0.48mW x 0.48mH	8 kg



100gsm OIL & FUEL ABSORBENT PADS


The SpilMax® range of absorbents have undergone extensive testing to ensure their absorbency and performance.

SpilMax® 100gsm Oil & Fuel Absorbent Pads will absorb a wide variety of plant and seed oils, hydrocarbons, petrochemicals and petroleum-based solvents. Because the pads are hydrophobic and repel water, they are an ideal absorbent for use around water and in wet conditions.

Even when fully saturated, these pads will float on water. They are ideal for use with spills in waterways, and for use on boats, in marinas, on wet worksites and in or near stormwater outlets. SpilMax® 100gsm Oil & Fuel Absorbent Pads can be used to capture small leaks, clean up small spills and wipe down tools, equipment or drum tops.

Made of melt blown polypropylene with dimples and scrim for greater durability. Each pad absorbs 250ml per saturation. Pads can be wrung out and reused many times during spill clean up.

TESTING: ASTM Test Method F726-06
“Sorbent Performance of Absorbents” to test maximum oil capacity.

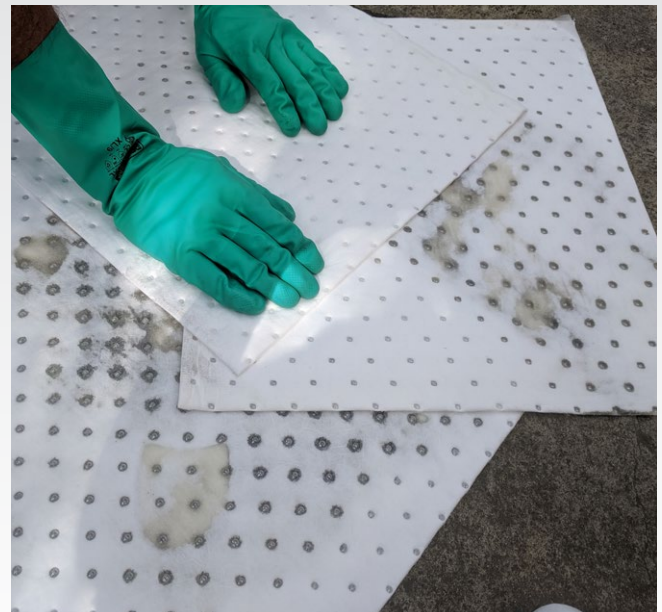

CODE	SIZE	PAD QTY	DIMENSIONS	WEIGHT
CH1326	480mmL x 430mmW	200/Box	0.50mL x 0.45mW x 0.27mH	5 kg

