




DrainSAFE™ 500 with Installation Kit

Silt and Sediment Control

STOP. CONTROL. COMPLY

DrainSAFE™ is a serviceable in-pit stormwater protection and isolation system designed to retrofit inside a drain pit. Its dual-mode design filters sediment, debris and hydrocarbons during normal operation, then provides rapid emergency isolation when required. Manufactured from UV-resistant HDPE with stainless steel components, it supports regulatory compliance, prevents contamination and promotes sustainable site management.

Product Code	Description	Length	Width	Capacity
CHDS02	DrainSAFE™ 500 with Installation Kit	625mm	775mm	80L
CHDS05	DrainSAFE™ 500 Unit Only	625mm	775mm	80L
CHDS06	DrainSAFE™ 500 with Installation Kit	1.3m	1.3m	80L
CHDS07	Oil Filters for DrainSAFE™	n/a		

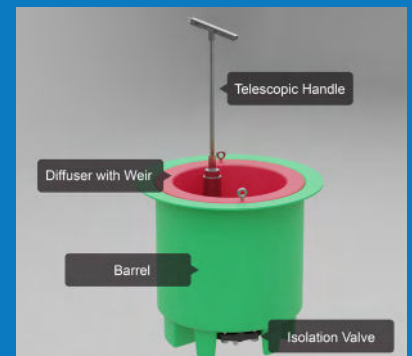

Specifications	
Material	4mm thick, UV-stabilised, corrosion- and chemical-resistant HDPE Polyethylene with Stainless Steel Telescopic Shaft
Weight	22kg
Flow Rate	33L/s
Manufactured Tolerance	+/- 2mm
Installation Components Included with the Unit	<ul style="list-style-type: none"> - HDPE pit skirt (1.2m x 1.2m x 15mm thick) - HDPE mounting blocks - Sealant - Concrete fastene

APPLICATION

- Fueling stations and truck loading zones
- Chemical and hazardous material handling areas
- Manufacturing and food processing facilities
- Warehouses and logistics hubs

DISCLAIMER: Chatoyer is not responsible for any product malfunctions, damage, or performance issues resulting from misuse, unauthorised modifications, improper installation, external environmental factors, or failure to follow recommended usage guidelines. This includes, but is not limited to, damage caused by accidents, natural disasters, power surges, or use with incompatible accessories. All warranties and support services apply only to products used in accordance with the manufacturer's instructions and within the intended operating conditions.



CHATOYER

WWW.CHATOYER.COM.AU | 1300 880 623

NSW 351 Wentworth Avenue, Pendle Hill, NSW 2145 QLD 2/27 Service St Maroochydore QLD 4558